

## PA44-625 AC PERMANENT MAGNET (PM) MOTOR

THE PA44-625 MOTOR HAS BEEN SELECTED TO PROVIDE HYBRID ELECTRIC DRIVE PROPULSION FOR THE U.S.C.G. NEW OFFSHORE PATROL CUTTER.

# THE PA44-625 AC PM MOTOR PROVIDES HIGHLY EFFICIENT AND COMPACT POWER FOR DEMANDING APPLICATIONS

### LEVERAGE THE BENEFITS OF PM TECHNOLOGY.

The Leonardo DRS PA series Permanent Magnet (PM) motors are designed to maximize the benefits of PM technology with direct water cooling. Inherently more efficient, this PM motor is one of the most power dense motors available in industry today. **At 395 lbs. the PA44-625 motor produces 1.6 horsepower per lb. at 3000 rpm.**

The completely enclosed water cooled PA44-625 motor has been utilized in top drive applications in the oil & gas industry for years, over 450 motors have entered service since 1985. This motor has also been in service in other applications including propulsion systems for buses and marine power and propulsion applications.

Leonardo DRS is a leader in the design and manufacture of advanced electrical machinery, focusing on machines for demanding jobs where efficient performance and

precise control are required. Our PM machines are ideal for drilling applications including top drives and mud pumps.

### BENEFITS

- Extremely power-dense
- Energy efficient
- Generator applications
- Low rotor inertia



# PA44-625 AC PERMANENT MAGNET (PM) MOTOR

## FEATURES

- Liquid cooling
- Dual stator
- Certified IP Class I Div. II: Explosive Environments
- Choice of internal or external splined shaft
- Max shaft speed of 6000 rpm

## OPTIONAL FEATURES

- CE ATEX, ABS Certification
- Special Shaft Extensions
- Rotor Temperature Sensor


## MOTOR SPECIFICATIONS

PERFORMANCE	P44-625
Rated power	625 HP (466 kW)
Rated speed	3,000 rpm
Rated torque	1,100 ft-lbs. (1491 Nm)
Rated volts	590 Vrms
Rated phase current	320 Arms
Rated frequency	700 Hz
Frequency constant	0.233 Hz/rpm
Max operating speed	3600 rpm
Rotor moment of inertia	0.9 kg m <sup>2</sup>
Efficiency at rated speed	95%


## PHYSICAL CHARACTERISTICS

Weight	395 lbs. (195 kg)
Cooling (water/glycol)	120° F (50° C) max
Coolant flow rate	7 gpm (3.5 gpm per stator)


## MOTOR CHARACTERISTICS

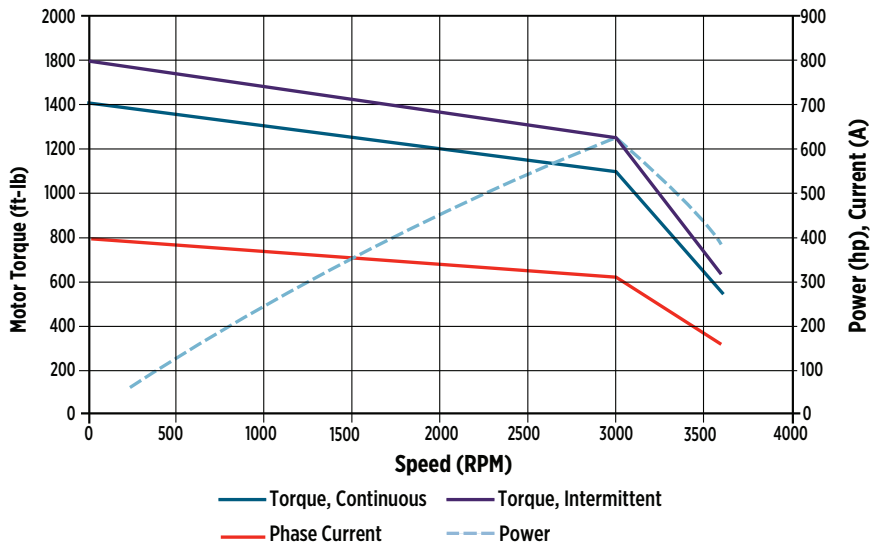

## MOTOR DIMENSIONS

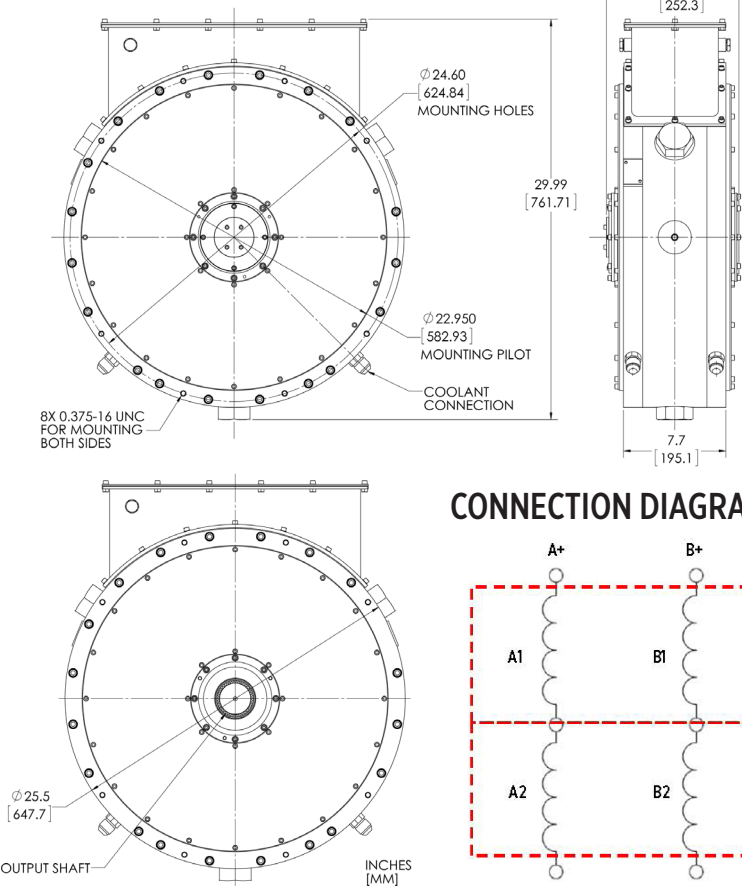

## CONNECTION DIAGRAM

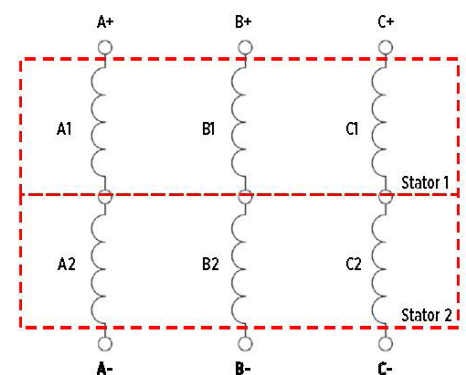

The information in this data sheet is to the best of our knowledge, accurate as of the date of issue. Nothing herein shall be deemed to create any warranty, expressed or implied. Copyright © Leonardo DRS 2018. All Rights Reserved. CLEARED FOR PUBLIC RELEASE - EAR99.

1-2019